

10-20-00

A

Practitioner's Docket No. 13382.00005

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application
 Assistant Commissioner for Patents
 Washington, D.C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of

Inventor(s): Bruno Mombrinie

For (title): TWO-PIECE BICYCLE CRANK SET

JC914 U.S. PTO
 09/692083
 10/19/00

1. Type of Application

This transmittal is for an original (nonprovisional) application.

CERTIFICATION UNDER 37 C.F.R. SECTIONS 1.8(a) AND 1.10*

(When using Express Mail, the Express Mail label number is **mandatory**;
 Express Mail certification is optional.)

MAILING561112.1 10/19/00

☒ deposited with the United States Postal Service in an envelope addressed to the Assistant Commissioner for Patents,
 Washington, D.C. 20231.

37 C.F.R. Section 1.8(a)

37 C.F.R. Section 1.10*

☐ with sufficient postage as first class mail.

☒ as "Express Mail Post Office to Address"
 Mailing Label No. EL58244033US
 (mandatory)

TRANSMISSION

☐ transmitted by facsimile to the Patent and Trademark Office (703) ____-____.

Date: 10-19-00

Signature

Kathy Krajicek
 (type or print name of person certifying)

***WARNING:** Each paper or fee filed by "Express Mail" **must** have the number of the "Express Mail" mailing label placed thereon prior to mailing. 37 C.F.R. Section 1.10(b).
 "Since the filing of correspondence under [Section] 1.10 without the Express Mail mailing label thereon is an oversight that can be avoided by the exercise of reasonable care, requests for waiver of this requirement will **not** be granted on petition " Notice of Oct. 24, 1996, 60 Fed. Reg. 56,439, at 56,442.

(New Application Transmittal--page 1 of 4)

2. Papers Enclosed

A. Required for filing date under 37 C.F.R. 1.53(b) (Regular) or 37 C.F.R. 1.153 (Design) Application

15 Page(s) of Specification
9 Page(s) of Claims
17 Sheet(s) of Drawing(s)--Informal

B. Other Papers Enclosed

3 Page(s) of declaration and power of attorney
1 Page(s) of abstract
1 Page Small Entity Statement

3. Declaration or Oath

Enclosed

Executed by inventor.

4. Inventorship Statement

The inventorship for all the claims in this application is the same.

5. Language

English

6. Fee Calculation (37 C.F.R. Section 1.16)

Regular Application

CLAIMS AS FILED					
Claims	Number Filed	Basic Fee Allowance	Number Extra	Rate	Basic Fee 37 CFR 1.16(a) \$710.00
Total Claims (37 CFR 1.16(c))	54	- 20 =	34 x	\$18.00	\$612.00
Independent Claims (37 CFR 1.16(b))	5	- 3 =	2 x	\$80.00	\$160.00
Multiple Dependent Claim(s), if any (37 CFR 1.16(d))			+	\$270.00	\$0.00
Filing Fee Calculation					\$1,482.00

7. Small Entity Statement(s)

Statement that this is a filing by a small entity under 37 C.F.R. Sections 1.9 and 1.27 is attached.

Filing Fee Calculation (50% of above) \$741.00

9. Method of Payment of Fees

Charge Account No. 50-1089 in the amount of \$741.00.
A duplicate of this transmittal is attached.

10. Authorization to Charge Additional Fees

The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to Account No. 50-1089.

37 C.F.R. Section 1.16(a), (f) or (g) (filing fees)

37 C.F.R. Section 1.16(b), (c) or (d) (presentation of extra claims)


37 C.F.R. Section 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application)

37 C.F.R. Section 1.17(a)(1)-(5) (extension fees pursuant to SECTION 1.136(a))

37 C.F.R. Section 1.17 (application processing fees)

11. Instructions as to Overpayment

Credit Account No. 50-1089.

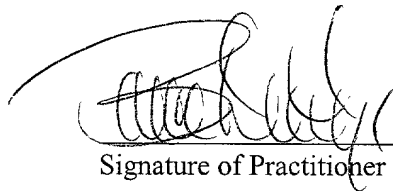

Signature of Practitioner

Reg. No.: 43,631
Tel. No.: 215-972-8387

Bruce D. George
Saul Ewing, LLP
Centre Square West
1500 Market Street, 38th Floor
Philadelphia, PA 19102

FROM :

FAX NO. :

Oct. 18 2000 11:58AM P2

Practitioner's Docket No. 13382.00005

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Mombinie, Bruno

Application No.: Not yet assigned
Filed on: Herewith
Title: Two-Piece Bicycle Crank Set

STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) and 1.27(b))--INDEPENDENT INVENTOR

As a below named inventor, I hereby state that I qualify as an independent inventor, as defined in 37 CFR 1.9(c), for purposes of paying reduced fees to the United States Patent and Trademark Office under Sections 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office, with regard to the invention described in the specification filed herewith, with title as listed above.


I have not assigned, granted, conveyed or licensed, and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c), if that person had made the invention, or to any concern that would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

No person, concern or organization exists to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention.

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Bruno Mombinie


Signature of Inventor

Date 10-18-2000

TWO-PIECE BICYCLE CRANK SET

Invented By:

Bruno Mombrinie

5

Related Applications

This application is a continuation-in-part (CIP) of applicant's copending United States Patent Application No. 09/580,336, filed May 26, 2000, entitled "Two-Piece Bicycle Crank Set," which application claims priority to United States Provisional Patent Application No. 60/136,669, filed May 28, 1999, entitled
10 "Two-Piece Bicycle Crank Set." The above referenced patent applications are incorporated in their entirety herein by this reference.

Field Of The Invention

The present invention relates generally to a bicycle crank set
15 assembly, and more particularly to a two-piece, tubular, continuous and tapered crank set combining high strength with light weight.

Background Of The Invention

In bicycle racing, the weight, strength, and rigidity of bicycle
20 components are of ultimate importance to bicycle enthusiasts. Lighter components (especially the rotating parts) having superior strength and rigidity are much sought after.

Information relevant to attempts to address these component characteristics can be found in the following US Patents: 5,493,937 to Edwards;
25 4,704,919 to Durham; and 5,924,336 to Richardson. However, each of these references suffers from one or more of the disadvantages described below. Therefore, these references do not effectively combine maximum load bearing capability with minimum weight.

Many existing bicycle crank sets include a two-piece crank axle
30 having intricately joined crank arms. The crank arms are often separate members mechanically attached to the crank axle portions and sometimes reinforced with

gussets. The mechanical attachments and reinforcing gussets undesirably result in a build up of weight at the attachment locations.

The present invention solves this problem by providing a continuous tubular member of monolithic design, combining a one-half crank axle portion with
5 a crank arm. This design avoids weighty joint and joint reinforcements, efficiently providing superior strength and rigidity while minimizing weight.

Many existing crank sets include crank arms having a constant cross-section along the crank arm length. Since bearing loads addressed by crank arms are not constant over the crank arm length, a crank arm having a constant cross-
10 section does not offer superior load carrying capabilities in relation to weight, thus being detrimental to achieving a maximum strength and rigidity to weight relationship.

The present invention provides tapered crank arms, analyzed for load bearing capacity at each point along the crank arm length. This design efficiently
15 provides the minimal cross-section necessary, at each point along the crank arm length, to accommodate the loads faced at each point along the crank arm length. The monolithic and continuous design distributes all stresses uniformly and equally over each piece of the crank set.

Some existing crank sets join two crank axle portions within a bracket
20 shell with a spline joint. Due to the nature of cyclical loads bearing on the crank axle, the weakest portion of the crank axle occurs at its smallest diameter, or at a stress concentration point. Since a spline joint joins one smaller diameter crank axle portion within another larger diameter crank axle portion, the overall crank axle bearing capacity is limited to its smaller diameter portion. Considering the limited
25 dimensions of the bracket shell, the spline joint does not offer maximum load bearing capacity relative to overall crank axle diameter.

The present invention provides a uniform crank axle diameter of tubular design, efficiently maximizing load bearing capacity relative to crank axle diameter.

Existing crank sets having larger diameter crank axles with
30 excessively reinforced and weighty couplings further require larger and heavier bearing sets or bearing set placement outside the bracket shell (as in Richardson).

Since the boundary conditions of the bracket shell are fixed, larger bearing sets result in less space to accommodate large diameter crank axles. Therefore, there exists a need for bearing sets made of higher strength materials, so that smaller bearing sets could accommodate the crank axle loads. These smaller bearing sets would offer more space within a typical bracket shell for larger diameter crank axles, thus increasing crank axle bearing capacity without resorting to bearing set placement outside the bracket shell, which has the disadvantage of widening the crank set assembly.

The present invention solves this problem by providing high strength bearing sets of a diameter substantially smaller than that in existing crank sets, thus accommodating crank axles of larger diameter within the fixed diameter of the bracket shell and providing a crank set of superior load bearing capacity.

Summary of the Invention

The present invention is directed to a two-piece bicycle crank set combining superior strength and rigidity with light weight. The crank set comprises two thin-wall tubular members. The tubular members include crank axle portions of relatively large diameter and light weight, tapered crank arms where torsional, bending and shear loads determine the tubular cross sectional size at each location along the crank arm length and a reinforcing insert at the distal end of the crank arm to accommodate a variety of pedal axles, or a tubular pedal axle incorporated within the continuous, monolithic crank axle and crank arm tubular member.

In one aspect of the present invention, the crank set is significantly lighter than existing crank set assemblies and has superior load bearing capability. The crank set is designed with torsional, bending and shear loads determining the dimensions of the tubular crank axle and the tapered crank arm cross-section. The tubular members are designed and shaped to distribute all stresses uniformly and equally over the continuous tubular member.

In one aspect of the present invention, the crank set includes bearing sets having ultra high strength ball bearings allowing for smaller bearing sets than those found in existing crank set assemblies, therefore providing additional space within the bracket shell for a larger diameter crank axle.

In another aspect of the present invention, the crank set is split midway along its crank axle, with each crank set piece containing precisely one-half of the total crank axle length. The two, one-half crank axle portions are coupled within the bracket shell precisely midway between the two bearing sets. Connecting
5 the crank axle portions precisely midway between the two bearing sets effectively eliminates all shear loads.

In another aspect of the present invention, the bicycle crank set comprises a first tubular member, a second tubular member, a spider connected to the second tubular member, and a coupling securing the first tubular member to the
10 second tubular member within a bracket shell. The first and the second tubular members include a crank arm and a portion of a crank axle forming a continuous and monolithic thin-wall tubular shape.

In another aspect of the present invention, the first and the second tubular members further include a pedal axle, where the crank arm, the portion of the crank axle and the pedal axle all form a continuous and monolithic thin-wall
15 tubular shape. In another of its aspects, a spider is further incorporated into the continuous, thin-wall tubular shape of the second tubular member.

In another aspect of the present invention, the first and the second tubular members are injection molded and made of aramid fiber composite material.
20 Alternatively, the first and the second tubular members could be injection molded and made of carbon and glass fiber composite material. Further, the first and the second tubular member could be steel stamped parts of clamshell design and electron beam or laser welded together to form the continuous and monolithic thin-wall tubular shape.

In another aspect of the present invention, the coupling includes an outer sleeve, an inner sleeve, two exteriorly tapered and internally threaded bushings, and a threaded stud. Turning the stud threadably positions the bushings to expand the inner sleeve, securing the crank axle portions of the first and the second
25 tubular members between the inner and the outer sleeves of the coupling.

In another aspect of the present invention, the coupling includes a mortise member and a tenon member. The tenon member fits into the mortise member to secure the crank axle portion of the first tubular member to that of the
30

second tubular member. This coupling can further include an attachment bolt that passes through a clearance hole in one of the tubular members and threadably engages an attachment hole in the other tubular member. Threading the attachment bolt into the attachment hole securely interlocks the tenon member into the mortise member. The mortise and the tenon members can be either tapered or non-tapered. This coupling can further include separation bolt, where removing the attachment bolt and threading the separation bolt into and through the clearance hole forces the tenon member apart and away from the mortise member.

In another aspect of the present invention, the clearance hole has a diameter of 10 mm and the attachment hole has a diameter of 8 mm. The diameter of the attachment bolt can be 8 mm and the diameter of the separation bolt can be 10 mm.

In another aspect of the present invention, the tenon and the mortise members are made of boron composites. Alternatively, the tenon and the mortise members can be made from high strength metal materials.

In another aspect of the present invention, the crank set further includes two bearing sets and the coupling within the bracket shell is located precisely midway between the two bearing sets. The bearing sets can include an outer cup, an inner cup, seals and ceramic balls. The ceramic balls can be housed within the outer cup, the inner cup and the seals and can be separated from one another by retainers. The outer cup is in communication with the bracket shell and the inner cup is in communication with the crank axle portion of one of the tubular members. The ceramic balls can be made of silicon nitride. The outer and the inner cups can be made of 52100 steel and can be hardened and sputter coated with titanium aluminum nitride to provide an overall hardness exceeding Rockwell 90. The seals can be spring loaded Teflon garter. The retainers can be made of mylar, nylon, Delrin or an adequate engineering plastic.

In another aspect of the present invention, the crank arm further includes an internally threaded titanium insert capable of housing a variety of pedals. The crank arm can include a compression molded solid carbon fiber and glass composite portion, in the vicinity of the titanium insert, to house the titanium insert.

Brief Description Of The Drawings

For the purpose of illustrating the invention, there is shown in the drawings a form which is presently preferred; it being understood, however, that
5 this invention is not limited to the precise arrangements and instrumentalities shown.

Figure 1 illustrates a top, cross-sectional view of a two-piece crank set coupled within a bracket shell, in accordance with the present invention;

Figure 2 illustrates a top, cross-sectional exploded view detailing the crank set housing shown in Figure 1;

10 Figure 3 illustrates a right side elevation view of the crank set housing shown in Figure 1, showing a tubular crank arm;

Figure 4 illustrates a left side view of the crank set housing shown in Figure 1, showing a tubular crank arm with connected spider;

15 Figure 5 illustrates a top, cross-sectional exploded view of a coupling portion of the crank set shown in Figure 1, with bushings in a non-operational position;

Figure 6 illustrates a top, cross-sectional exploded view of the coupling shown in Figure 5, with the bushings in an operational position;

20 Figure 7 illustrates a side, cross-sectional view of a reinforcing insert used to support a pedal axle, in accordance with the present invention;

Figure 8 illustrates a side elevation view of the coupling shown in Figure 5, without including the bushings;

25 Figure 9 illustrates a top plan view of another embodiment of the tubular member shown in Figure 3, including a crank arm, a portion of a crank axle and a reinforcing insert aperture, in accordance with the present invention;

Figure 10 illustrates a side plan view of another embodiment of the tubular member with connected spider shown in Figure 4, in accordance with the present invention;

30 Figure 11 illustrates a top plan view of an alternative embodiment of the tubular member with connected spider shown in Figure 4, including a crank arm, a portion of a crank axle, a spider and a pedal axle, in accordance with the present invention;

Figure 12 illustrates an exploded and perspective view of an interference fit coupling, including a mortise member and a tenon member, in accordance with the present invention;

Figure 13 illustrates an exploded and perspective view of a tapered four coupling, including a male member and a female member, in accordance with the present invention;

Figure 14 illustrates a top, cross-sectional detailed view of an interference fit coupling centered between two bearing sets within a bracket shell, in accordance with the present invention;

Figure 15 illustrates a perspective view of a retaining ring with ball bearings of a bearing set, in accordance with the present invention;

Figure 16 illustrates a perspective view of an outer cup with integral inner seal of a bearing set, in accordance with the present invention;

Figure 17 illustrates a perspective view of an attachment bolt for an interference fit coupling or tapered four coupling, in accordance with the present invention;

Figure 18 illustrates a perspective view of the tubular member shown in Figure 9, with a tenon member of an interference coupling attached to the tubular member (also having an inner cup with integral outer seal press fit onto the tenon member), in accordance with the present invention;

Figure 19 illustrates a side plan view of the tubular member with connected spider shown in Figure 10, further showing a tab covering an access hole for coupling assembly and disassembly, in accordance with the present invention; and

Figure 20 illustrates a perspective, exploded view of a crank set assembly with an interference fit coupling, in accordance with the present invention.

Detailed Description Of The Invention

Referring now to the drawings, wherein like numerals indicate like elements, there is shown in the drawings in general, and in Figure 1 in particular, a two-piece bicycle crank set 8, comprising two, continuous thin-wall tubular members 10, each tubular member 10 including a continuous crank arm 40, a one-

half crank axle 50, and a reinforcing pedal axle insert 80. The crank arms 40 are tapered. The reinforcing inserts 80 (detailed in Figure 7), inserted in the distal end of the crank arm 40, are solid core and include a standard interior thread within pedal axle aperture 30, allowing for attachment of a variety of pedals (not shown).

- 5 The drive side continuous tubular member 10 further includes a spider 60, on which chain gears are mounted (not shown).

The two continuous tubular members 10 each contain a crank axle 50 portion precisely equaling one-half of the total crank axle length of the crank set 8. Therefore, the connection between the tubular members 10 is centrally located
10 between two bearing sets 16 within a bracket shell 14. Other embodiments may have the tubular members 10 containing other than precisely one-half of the crank axle, meaning the connection between the tubular members 10 is not centrally located between the two bearing sets 16 within the bracket shell 14.

Referring to Figure 2, each continuous tubular member 10 of this
15 embodiment has a convoluted split 12. When the continuous tubular members 10 are brought together in a mating position, the crank arms 40 are located 180° from each other. Thus, the torque from one crank arm 40 is transmitted to the other crank arm 40.

A sleeved coupling 100 secures the two continuous tubular members
20 10 together. The convoluted split 12 attachment of the two, one-half crank axles 50 are sandwiched between an inner sleeve 110 and an outer sleeve 120 of the sleeved coupling 100, as shown in Figures 2 and 5. The inside diameter 130 of the inner sleeve 110 is conically tapered from its mid-section to its outer edges.

Two matching bushings 140, having outside diameters 160 exteriorly
25 tapered to accommodate the conically tapered inside diameter 130 of the inner sleeve 110, are placed in each end of the inner sleeve 110. When the bushings 140 are drawn together, as shown in Figure 6, they expand the inner sleeve 110, squeezing the one-half crank axles 50 against the outer sleeve 120. The bushings 140 are threaded on their inside diameter 170, and are drawn together on a threaded
30 stud 150. One bushing 140 is threaded right-handed and the other bushing 140 is threaded left-handed. The threaded stud 150 is reversed threaded at each end to match the bushings 140 and to allow both bushings 140 to come together on the stud

150 by turning the stud 150. Turning the stud 150 one way forces the bushings 140 together, securing the one-half crank axles 50 to the outer sleeve 120. Turning the stud 150 the opposite way releases separates bushings 140, releasing the one-half crank axles 50 from secure attachment to the outer sleeve 120.

5 The stud 150 has a hexagonal hole 180 extending through its length, as shown in Figure 8. The stud 150 is turned with a matching hex key wrench inserted into the hole 180 (not shown).

 This design provides several advantages for bicycle crank set assemblies. Referring to Figure 1, the continuous tubular member 10 is shaped to
10 distribute the stresses in the crank set uniformly and equally throughout. This design distributes structural stresses uniformly along the thin-wall 20 of the continuous tubular member 10, from the pedal axle insert 80, down the crank arm 40, across the crank axle, to the spider 60 holding the chain gears (not shown). The spider 60 reinforces the drive side continuous tubular member 10, since it is an
15 integral part of it. Fabricating the spider 60 out of tubular sections also minimizes the weight.

 As a further advantage, the use of standard-thread, solid core reinforcing inserts 80 allows the mounting of a variety of sophisticated pedals with little additional weight. The two continuous tubular members 10 are further
20 designed for practical and easy installation on a bicycle. By splitting the crank set midway along the crank axle in a precise manner, easy installation is achieved while maintaining structural integrity. The convoluted split 12 of the continuous tubular members 10 allows transmission of the torque from one side of the crank set to the other side of the crank set without stress concentration at the central joint.

25 Although the crank set can be fabricated from a host of materials, the crank set is preferably fabricated of materials oriented to make full use of their ultimate strength. In one embodiment, the material is an aramid fiber composite. In another embodiment, the material is a carbon and glass fiber composite. In yet another embodiment, the continuous tubular members 10 are steel stamped parts,
30 made into clamshells and electron beam or laser welded together.

 The tapered design of the continuous crank arm 40 of the present invention requires approximately two-thirds of the material of a non-tapered crank

arm (i.e. a straight crank arm requires nearly twice as much material as the crank arm of the present invention). Further, the tapered crank arm can carry the same load as a straight crank arm. Therefore, structural performance is maintained while weight is significantly decreased.

5 Another embodiment of a one piece, monolithic and continuous tubular member 10 begins with Figure 9. Figure 9 illustrates a monolithic and continuous thin-wall tubular member 10 (alternative to that in Figure 3) including a crank axle 54, a crank arm 40 and a pedal axle reinforcing insert aperture 82. The tubular member 10 can be made of a composite material having thin-wall 20 construction, such as aramid fiber composites or carbon and glass fiber composites. Alternatively, the tubular member 10 can be steel stamped parts of clamshell design, electron beam or laser welded to together. The composite embodiment is injection molded and is literally a one-piece, continuous and monolithic tubular member. The steel embodiment, although steel stamped and welded together, is continuous and monolithic nonetheless, as the tubular member 10 has no discontinuities in form, no mechanical junction (connection) points, and no reinforcing gussets. The continuous and monolithic design of either the composite or steel embodiment minimizes weight without sacrificing strength and rigidity.

Figure 10 illustrates a side elevation of another embodiment of a drive-side continuous tubular member 10 (alternative to that in Figure 4), showing a spider 60, a crank arm 40 and a pedal axle reinforcing insert aperture 82. Figure 11 illustrates a plan view of another embodiment of the drive-side continuous tubular member 10 shown in Figure 10, showing a crank axle 54, a spider 60, a crank arm 40 and a pedal axle 32. The drive-side tubular member 10 can also be made of a composite material having thin-wall 20 construction, or steel stamped welded parts, and incorporates the pedal axle 32 into the continuous one-piece monolithic construction.

The spider 60 includes sprocket tangs 61 to connect the chain gear (not shown). In the composite embodiment of the drive-side tubular member 10, the area of the spider 60 in the vicinity of each sprocket tang 61 is solid and capably withstands the loads imposed by the chain gear. In the steel stamped embodiment of

the drive-side tubular member 10, the sprocket tang 61 is hollow and is formed as an integral part of the clamshells.

Figure 12 illustrates an interference fit coupling 200 having a mortise member 202 and a tenon member 204. The mortise and the tenon members 202, 204 are made of steel and each include cylindrical, tubular walls 207 terminating with a flared tip 216 arrangement (the flared tip arrangement is better illustrated in Figure 14). The mortise and the tenon members 202, 204 are cylindrically sleeved over the crank axle 54 portions of the tubular members 10 to form a crank axle extending from each tubular member 10 of the crank set 8 equal to exactly one-half of the total crank axle length of the crank set 8. A line 52, shown in each of Figures 9 and 11, illustrates the extent that the flared tip 216 arrangement of the mortise or the tenon members 202, 204 extends over (is sleeved over) the crank axle 54 portions of each tubular member 10. A .009 inch to .011 inch thick layer of high strength epoxy structural adhesive, such as 3M DP-420, can be used to attach the mortise or the tenon member 202, 204 to the crank axle portion 54 of the tubular member.

The one-half crank axle 50 portions of the tubular members 10 (as shown in Figure 18 and 20), which include the mortise 202 or the tenon 204 member sleeved over the crank axle 50 portion of the tubular member 10, are non-tapered and align opposing crank arms 40 180° from each other. Figures 18 and 20 also illustrate an outer cup 220 and an inner seal 229 press fit onto the one-half crank axle portion 50. The interference fit coupling 200 effectively transmits all torque and bending moments across the coupling 200, as the central location of the coupling 200 (between the two bearing sets 16, as shown in Figure 14) within the bracket shell 14 eliminates all shear loads. The interference fit coupling 200, therefore, avoids any undesirable backlash or play in the crank set 8 due to high loads or wear.

Figure 13 illustrates a tapered four coupling 210 having a male tapered four member 212 and a female tapered four member 214. The male and female members 212, 214 each have four tapered sides, each having equal surface area. The tapered four coupling 210 is made of steel and each member 212, 214 includes a cylindrical, tubular wall 207 terminating with a flared tip 216

arrangement. Similar to the interference fit coupling 200, the male and the female members 212, 214 are cylindrically sleeved over and adhered to the crank axle 54 portions of the tubular members 10 to form a crank axle extending from each tubular member 10 of the crank set 8 equal to exactly one-half of the total crank axle length of the crank set 8. The line 52, shown in each of Figures 9 and 11, also illustrates the extent that the flared tip 216 arrangement of the male and the female tapered four members 212, 214 extend over (are sleeved over) the crank axle 54 portions of each tubular member 10.

The tapered four coupling 210 also aligns opposing crank arms 40 180° from each other and effectively transmits all torque and bending moments across the coupling 210, as the central location of the coupling 210 (between the two bearing sets 16) eliminates all shear loads.

The interference fit coupling 200 and the tapered four coupling 210 distributes all loads across the point of attachment of the one-half crank axle portions 50 in a uniform and seamless fashion. The flared tip arrangement 216 minimizes any uneven stress distribution. The sleeved coupling 200, 210 design also facilitates the distribution of bearing loads over a greater area, minimizing concentrated loads on the tubular member 10. Concentrated loads on the tubular members 10 must be minimized if the tubular members 10 are to be made of composite materials.

The interference fit coupling 200 is superior to splined, or even the tapered four coupling 210, due to a more economical and simpler fabrication process. The tapered four coupling 210 is cast, forged or stamped and then requires significant machining before use. The interference fit coupling 200 can be machined from a standard milling machine and used immediately. Other couplings also require refinement, or a higher level of machining, after initial fabrication. The interference fit coupling 200 is extremely rugged; overtightening during assembly will cause no damage.

For assembly and disassembly purposes, the interference fit coupling 200 and the tapered four coupling 210 include a clearance hole 206 within one crank axle 50 portion, and an attachment hole 208 within an opposite crank axle 50

portion. The clearance hole 206 has a larger diameter than the attachment hole 208. The clearance hole and the attachment holes are interiorly threaded.

To assemble the interference fit coupling 200 or the tapered four coupling 210, a threaded attachment bolt having a diameter equal to that of the attachment hole 208 can be placed through the clearance hole 206 and into the attachment hole 208. Threading the attachment bolt 209 (shown in Figure 17) into the attachment hole 208 draws the mortise 202 and the tenon 204 members (or the male and the female members 212, 214 of the tapered four coupling 210) into interlocking engagement, due to a head of the attachment bolt 209 being larger than the diameter of the clearance hole 206. The attachment bolt 209 can be a 4.9 gram titanium Allen head bolt.

It is to be understood, however, that the attachment bolt 209 can be used to facilitate coupling assembly (the pulling together of either the mortise and the tenon members 202, 204 of the interference fit coupling 200 or the male and the female tapered four members 212, 214 of the tapered four coupling 210). The attachment bolt 209 is not necessary to hold the respective members of the interference fit coupling 200 or the tapered four coupling 210 together during crank set 8 use. The attachment bolt 209 can be removed after coupling 200, 210 assembly.

Removal of a tab 42 (shown in Figures 1, 2, 3, 4, 18 and 19) provides access to the coupling (whether the sleeved coupling 100, the interference fit coupling 200, or the tapered four coupling 210 is being used) within the bracket shell 14 for coupling assembly and disassembly (for operation of the threaded stud 150 or for installation/removal of the attachment bolt 209 or separation bolt). The tab 42 is titanium, is press fit within a recess in the crank arm 40, and contains a double O-ring to seal out contaminants.

To disassemble the interference fit coupling 200 or the tapered four coupling 210, the attachment bolt 209 is removed and a threaded separation bolt (not shown) having a diameter equal to that of the clearance hole 206 is threaded into and through the clearance hole 206 until an end of the separation bolt forces the tenon member 204 out of engagement with the mortise member 202, or the male tapered four member 212 out of engagement with the female tapered four member

214. Alternatively, the attachment bolt 209 can be threaded through the attachment hole 208 while the separation bolt is threaded through the clearance hole 206 so that an end of each bolt meet within the coupling 200, 210. Turning one, or both bolts against the end of the other bolt will also separate the mortise member 202 from the tenon member 204, or the male tapered four member 212 from the female tapered four member 214. Using both the attachment bolt 209 and the separation bolt for disassembly insures that no marring or crushing occurs to the interlocking members of the interference fit coupling 200 or the tapered four coupling 210.

The interference fit coupling 200 and the tapered four coupling 210 are preferably fabricated from ultra-high strength, corrosion resistant metal having outstanding fatigue properties and high toughness. In one embodiment of the invention, 17-4 PH is used, an age hardened stainless steel. 17-4 PH steel can be hardened to yield strengths over 200,000 psi (standard steels have a strength of 60,000 psi). 17-4 PH steel has incredible toughness, corrosion resistance and fatigue strength.

Figure 14 illustrates a top, cross-sectional detail view of an interference fit coupling 200 centered between two bearing sets 16 within a bracket shell 14. Each bearing set 16 includes an outer cup 220, an inner cup 222, ceramic balls 224, a retaining ring 226, an outer seal 228 and an inner seal 229.

In one embodiment of the present invention, the ceramic balls 224 are 3.2 mm silicon nitride. The outer and the inner cups 220, 222 (the outer cup 220 is shown in Figure 16) are 52100 steel and are hardened to approximately Rockwell 60. The cups 220, 222 are then sputter coated with titanium aluminum nitride, giving the cups 220, 222 a hardness of over Rockwell 90. In addition to extreme hardness, the sputter coating enhancing the lubricity of a surface of the cups 220, 222 and provides corrosion resistance. The retaining ring (shown in Figure 15) can be mylar, nylon, Delrin, or any engineering plastic capable of separating the ceramic balls 224 and preventing ball on ball grinding. The seals 228, 229 (the inner seal 229 is shown in Figure 16 as an integral part of the outer cup 220) are spring loaded Teflon garter seals, offering 25 to 50 times more pressure on the crank axle than rubber lip seals while having less retarding torque. Similarly, the outer seal 228 is formed as an integral part of the inner cup 222.

Referring to Figure 20, assembling the crank set 8 within the bracket shell 14 is accomplished as follows: the outer cups 220 with integral inner seals 229, housing the retaining ring 226 and ceramic balls 224, are threaded into the bracket shell 14; the one-half crank axle 50 portions of the tubular members 10 (with the inner cups 222 and integral outer seals 228) are inserted into each end of the bracket shell 14 (within the outer cups 220 and the retaining rings 226); the interference fit coupling 200 is mated (using the attachment bolt 209 if desired); and, the outer and the inner cups 220, 222 of the bearing sets 16 are slightly separated to pre-load the bearing sets 16 (taking any play out of the crank set 8). Either the outer or the inner cup 220, 222 can be screwed out, providing lateral movement of approximately two to three millimeters in the crank set 8 for adjustment within the bracket shell 14. The assembly process requires no shims or spacers. The outer cups 220 are secured in place with Locktite.

To accommodate standard pedals, the reinforcing insert 80 of the composite embodiment of the crank set 8 is interiorly threaded and made of titanium. The reinforcing pedal axle insert 80 is either molded or epoxied in place within the reinforcing insert aperture 82 of the crank arms 40. An area of the composite crank arm 40 (in the vicinity of the aperture 82) is made of solid carbon fiber and glass composite and is compression molded. The hollow sections of the crank arm 40 can either be compression molded around a Styrofoam plug or bladder molded with a custom shaped nylon bladder, or a straight latex bladder. In the steel version of the crank set 8, the reinforcing insert 80 is machined separately and welded in place either at the end of the crank arm 40 or through the crank arm 40. No additional material, such as gussets, surrounds the reinforcing insert 80.

These and other advantages of the present invention will be apparent to those skilled in the art from the foregoing specification. Accordingly, it will be recognized by those skilled in the art that changes or modifications may be made to the above-described embodiments without departing from the broad inventive concepts of the invention. It should therefore be understood that this invention is not limited to the particular embodiments described herein, but is intended to include all changes and modifications that are within the scope and spirit of the invention.

Claims

What is claimed is:

1. A bicycle crank set, comprising:
 - 5 a. a first tubular member;
 - b. a second tubular member;
 - c. a spider connected to the second tubular member; and
 - d. a coupling securing the first tubular member to the second tubular member.
- 10 2. The crank set of claim 1, wherein the first and the second tubular members include:
 - a. a crank arm; and
 - b. a portion of a crank axle; the crank arm and the portion of the crank axle forming a continuous, monolithic thin-wall tubular shape.
- 15 3. The crank set of claim 2, wherein the first and the second tubular members further include a pedal axle; the crank arm, the portion of the crank axle and the pedal axle forming a continuous, monolithic thin-wall tubular shape.
4. The crank set of claim 2, wherein the spider is incorporated into the continuous, monolithic thin-wall tubular shape of the second tubular member.
- 20 5. The crank set of claim 2, wherein the portion of the crank axle is precisely one-half of a total crank axle length of the crank set.
6. The crank set of claim 2, wherein the crank arm is tapered.
7. The crank set of claim 6, wherein the tapered crank arm further comprises an elliptical cross-section and is designed to distribute stresses uniformly
- 25 and equally over a length of the crank arm.

8. The crank set of claim 2, wherein the first and the second tubular members are injection molded, comprising an aramid fiber composite material.

9. The crank set of claim 2, wherein the first and the second tubular members are injection molded, comprising a carbon and glass fiber composite material.

10. The crank set of claim 2, wherein the first and the second tubular members are steel-stamped parts of clamshell design electron beam or laser welded together to form the continuous, monolithic thin-wall tubular shape.

11. The crank set of claim 1, wherein the coupling includes:

10 a. an outer sleeve;

b. an inner sleeve;

c. two exteriorly tapered, internally threaded bushings; and

d. a threaded stud; wherein turning the stud threadably positions the bushings to expand the inner sleeve, thereby securing a connection between the

15 first and the second tubular members between the inner and the outer sleeves.

12. The crank set of claim 11, wherein the connection between the first and the second tubular member includes interlocking an end of the crank axle portion of the first and the second tubular members, the end of the crank axle portions having a convoluted split configuration.

13. The crank set of claim 1, wherein the coupling includes:

20 a. a mortise member; and

b. a tenon member, wherein the tenon member fits into the mortise member to secure the first tubular member to the second tubular member.

14. The crank set of claim 13, wherein the coupling further includes an attachment bolt, the attachment bolt passing through a clearance hole in the tenon member and threadably attaching to an attachment hole in the mortise member, whereby threading the attachment bolt into the attachment hole in the mortise member securely interlocks the tenon member into the mortise member.

15. The crank set of claim 13, wherein the coupling further includes an attachment bolt, the attachment bolt passing through a clearance hole in the mortise member and threadably attaching to an attachment hole in the tenon member, whereby threading the attachment bolt into the attachment hole in the tenon member securely interlocks the mortise member into the tenon member.

16. The crank set of claim 13, wherein the mortise member and the tenon member are non-tapered.

17. The crank set of claim 13, wherein the mortise member and the tenon member align to place the crank arms in 180° relation to one another.

18. The crank set of claim 14, wherein the clearance hole is threaded and has a diameter greater than the diameter of the attachment hole, the coupling being separated by threading a separation bolt into the clearance hole and rotating the separation bolt until an end of the separation bolt forces the tenon member apart and away from the mortise member.

19. The crank set of claim 15, wherein the clearance hole is threaded and has a diameter greater than the diameter of the attachment hole, the coupling being separated by threading a separation bolt into the clearance hole and rotating the separation bolt until an end of the separation bolt forces the mortise member apart and away from the tenon member.

20. The crank set of claim 13, wherein the coupling is made of a boron composites.

21. The crank set of claim 13, wherein the coupling is made of steel.

22. The crank set of claim 13, further comprising two bearing sets,
5 wherein the coupling is located precisely midway between the two bearing sets.

23. The crank set of claim 1, further comprising two bearing sets,
wherein the coupling is located precisely midway between the two bearing sets.

24. The crank set of claim 23, wherein the bearing sets include:

- a. an outer cup;
- 10 b. an inner cup;
- c. seals; and
- d. ceramic balls, the balls being housed within the outer cup, the inner cup and the seals and are separated by a retaining ring.

25. The crank set of claim 24, wherein the ceramic balls are made of
15 silicon nitride.

26. The crank set of claim 24, wherein the outer cup and the inner cup are made of 52100 steel and are hardened and sputer coated with titanium aluminum nitride to provide an overall hardness exceeding Rockwell 90.

27. The crank set of claim 24, wherein the seals are spring loaded Teflon
20 garter.

28. The crank set of claim 2, wherein the crank arm further includes an internally threaded titanium insert.

29. The crank set of claim 28, wherein the crank arm includes a compression molded carbon fiber and glass composite portion, in the vicinity of the insert, to house the insert.

30. The crank set of claim 18, wherein the diameter of the clearance hole is 10 mm, the diameter of the attachment hole is 8mm, the diameter of the attachment bolt is 8mm and the diameter of the separation bolt is 10mm.

31. The crank set of claim 19, wherein the diameter of the clearance hole is 10 mm, the diameter of the attachment hole is 8mm, the diameter of the attachment bolt is 8mm and the diameter of the separation bolt is 10mm.

32. The crank set of claim 24, wherein the retaining ring is mylar.

33. A bearing set for a bicycle, comprising:

- a. an outer cup;
- b. an inner cup;
- c. seals; and

34. ceramic balls, the balls being housed within the outer cup, the inner cup and the seals and are separated by a retaining ring.

35. The crank set of claim 33, wherein the ceramic balls are made of silicon nitride.

36. The crank set of claim 33, wherein the outer cup and the inner cup are made of 52100 steel and are hardened and sputer coated with titanium aluminum nitride to provide an overall hardness exceeding Rockwell 90.

37. The crank set of claim 33, wherein the seals are spring loaded Teflon garter.

38. The crank set of claim 33, wherein the retaining ring is mylar.

38. An interference fit coupling for attaching two crank axle portions of a crank set, comprising:

- a. a mortise member; and
 - b. a tenon member, wherein the tenon member fits into the
- 5 mortise member to secure the two crank axle portions of the crank set.

39. The coupling of claim 38, further comprising an attachment bolt, the attachment bolt passing through a clearance hole in the tenon member and threadably attaching to an attachment hole in the mortise member, whereby threading the attachment bolt into the attachment hole in the mortise member

10 securely interlocks the tenon member into the mortise member. .

40. The coupling of claim 38, further comprising an attachment bolt, the attachment bolt passing through a clearance hole in the mortise member and threadably attaching to an attachment hole in the tenon member, whereby threading the attachment bolt into the attachment hole in the tenon member securely interlocks

15 the mortise member into the tenon member. .

41. The coupling of claim 39, wherein the clearance hole is threaded and has a diameter greater than the diameter of the attachment hole, the coupling being separated by threading a separation bolt into the clearance hole and rotating the separation bolt until an end of the separation bolt forces the tenon member apart and

20 away from the mortise member.

42. The coupling of claim 40, wherein the clearance hole is threaded and has a diameter greater than the diameter of the attachment hole, the coupling being separated by threading a separation bolt into the clearance hole and rotating the

separation bolt until an end of the separation bolt forces the mortise member apart and away from the tenon member.

43. The coupling of claim 38, wherein the mortise and the tenon members each have cylindrically tubular walls, the cylindrically tubular walls are
5 each sleeved over a composite crank axle portion of a tubular member.

44. The coupling of claim 43, wherein the cylindrically tubular walls are secured to the composite crank axle portion of the tubular member by high strength epoxy adhesive.

45. A method for assembling a crank set within a bracket shell of a
10 bicycle, comprising:

- a. threading outer cups of a bearing set into each of two ends of the bracket shell;
- b. inserting inner cups of the bearing sets onto each of a crank axle portion of two crank set members;
- 15 c. inserting the crank axle portion of one of the two crank set members into each end of the bracket shell within the outer cups and retaining rings of each bearing set;
- d. interlocking the crank axle portions of the two crank set members;
- 20 e. preloading the two bearing sets; and
- f. securing the outer cups to the bracket shell.

46. The method of claim 45, wherein the two crank axle portions of the crank set members are interlocked by fitting a tenon member on an end of one crank axle portion into a mortise member on an end of another crank axle portion.

47. The method of claim 46, wherein the tenon member is fitted into the mortise member by an attachment bolt, the attachment bolt passing through a clearance hole in an end of one crank axle portion and threadably attaching to an attachment hole in an end of another crank axle portion.

5 48. A tapered four coupling for attaching two crank axle portions of a crank set, comprising:

a. a male member having four tapered sides, each of equal surface area; and

10 b. a female member having four tapered sides, each of equal surface area, wherein the four tapered sides of the male member interlock with the four tapered sides of the female member to secure the two crank axle portions of the crank set.

15 49. The coupling of claim 48, further comprising an attachment bolt, the attachment bolt passing through a clearance hole in the male member and threadably attaching to an attachment hole in the female member, whereby threading the attachment bolt into the attachment hole in the female member securely interlocks the male member into the female member. .

20 50. The coupling of claim 48, further comprising an attachment bolt, the attachment bolt passing through a clearance hole in the female member and threadably attaching to an attachment hole in the male member, whereby threading the attachment bolt into the attachment hole in the male member securely interlocks the female member into the male member. .

51. The coupling of claim 49, wherein the clearance hole is threaded and has a diameter greater than the diameter of the attachment hole, the coupling being

separated by threading a separation bolt into the clearance hole and rotating the separation bolt until an end of the separation bolt forces the male member apart and away from the female member.

52. The coupling of claim 48, wherein the male and the female members
5 each have cylindrically tubular walls, the cylindrically tubular walls are each sleeved over a composite crank axle portion of a tubular member.

53. The coupling of claim 52, wherein the cylindrically tubular walls are secured to the composite crank axle portion of the tubular member by high strength epoxy adhesive.

10 54. The coupling of claim 48, wherein the two crank axle portions are equal in length.

15

20

TWO-PIECE BICYCLE CRANK SET

Abstract

The present invention is a two-piece bicycle crank set comprising of
5 two monolithic, thin-wall continuous tubular members. Each tubular member
includes a crank arm and a one-half portion of a crank axle, where the crank arm
and the portion of the crank axle form a continuous thin-wall tubular shape. The
two tubular members are coupled precisely midway between two bearing sets within
a bracket shell of a bicycle. The coupling connecting the two tubular members can
10 include an outer sleeve, an inner sleeve, two exteriorly tapered and internally
threaded bushings and a threaded stud. Turning the threaded stud positions the
bushings to expand the inner sleeve, whereby the crank axle portions of the two
tubular members are secured within the inner sleeve and the outer sleeve by the
expanding inner sleeve. Alternatively, an interference fit coupling connects the two
15 tubular members, and includes a mortise member and a tenon member. The tenon
member fits into and interlocks within the mortise member to secure the first tubular
member to the second tubular member. The interference fit coupling can further
include an attachment bolt and a separation bolt to facilitate assembly and
disassembly of the coupling.

20

FIG. 1 is a schematic diagram of a device 8, showing a cross-sectional view of a tube 10 with a central channel 20. The tube 10 is connected to a manifold 40, which is further connected to a series of components including a valve 50, a filter 100, and a sensor 150. The device 8 is shown in a cross-sectional view, with the tube 10 and manifold 40 being the main components. The valve 50 is a check valve that allows flow in one direction. The filter 100 is a mesh filter that traps any debris. The sensor 150 is a pressure sensor that monitors the pressure in the channel 20. The device 8 is shown in a cross-sectional view, with the tube 10 and manifold 40 being the main components.

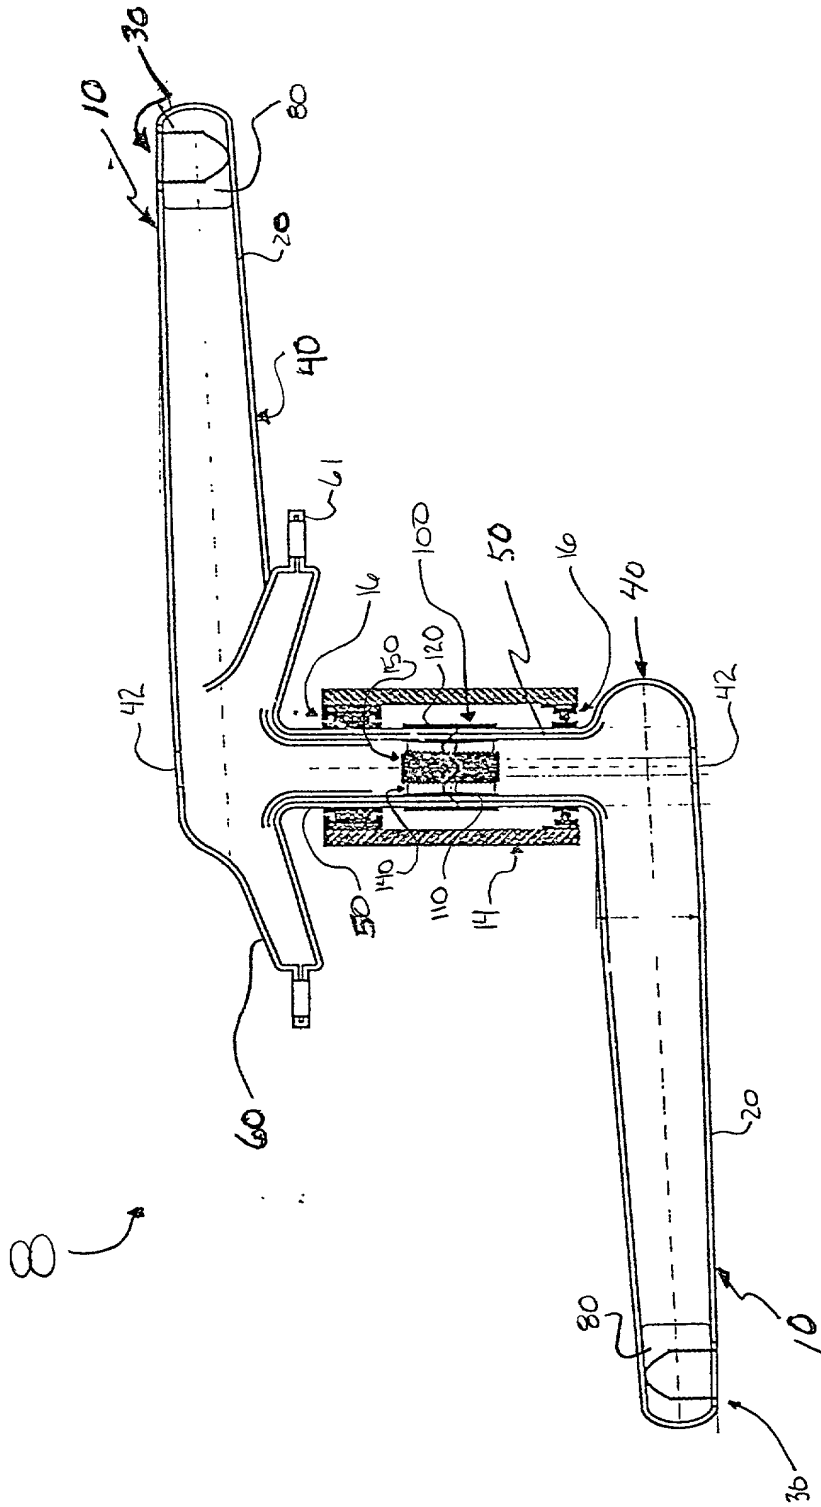


FIG. 1

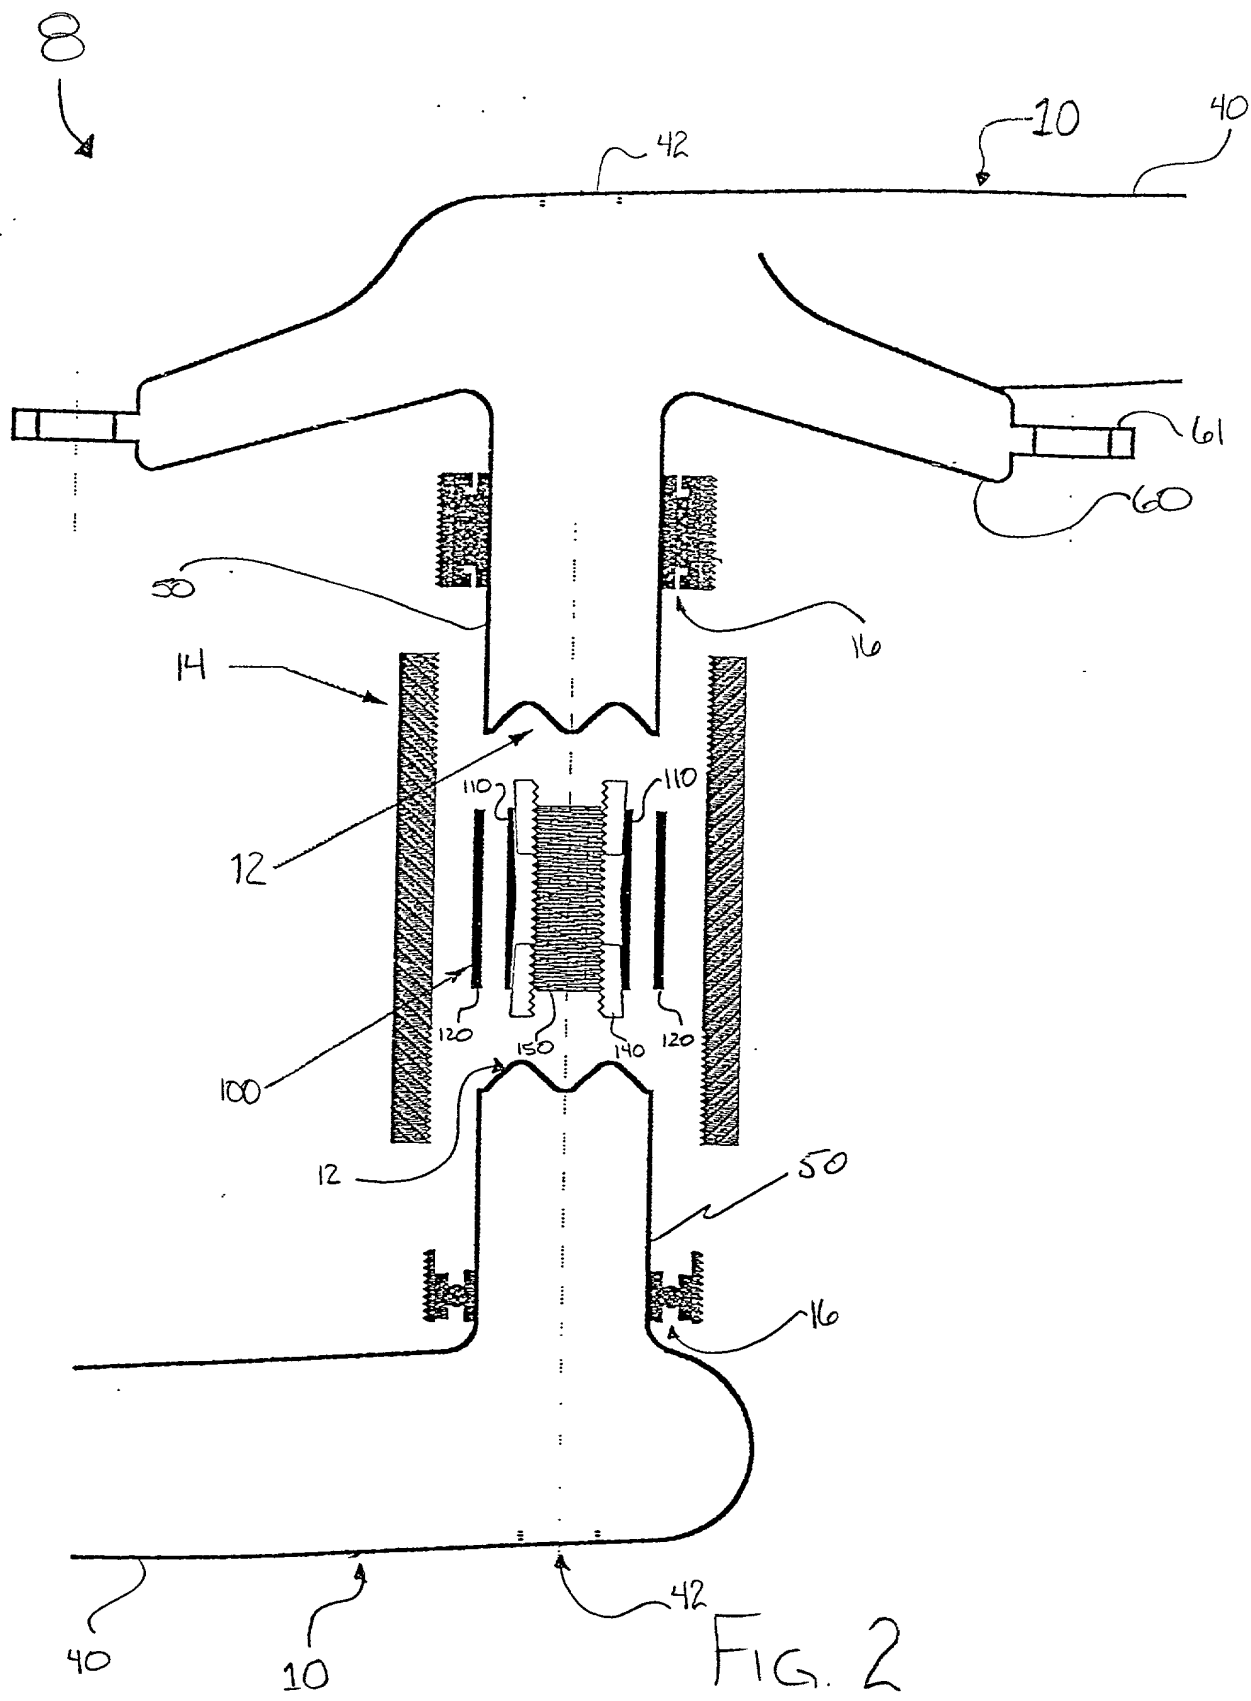


FIG. 2

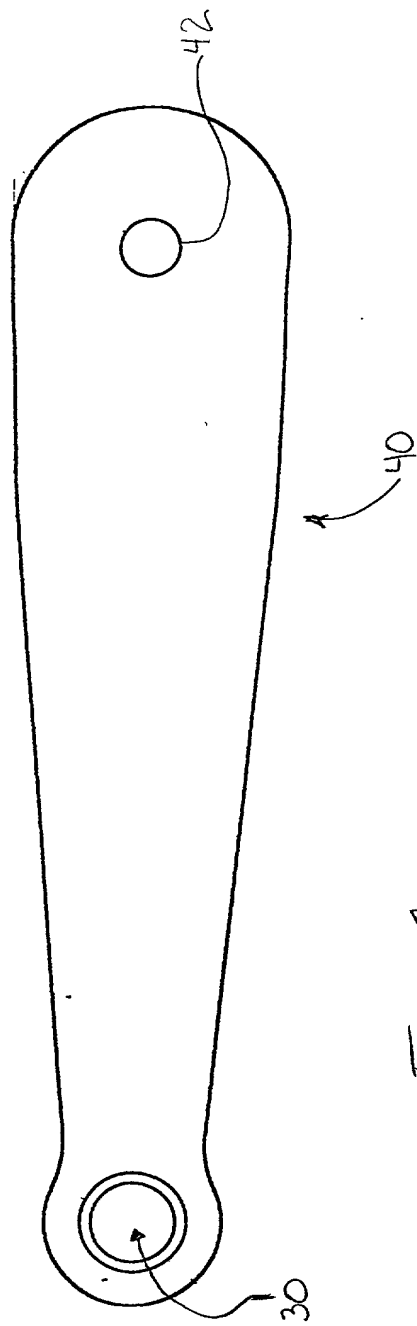


FIG. 3

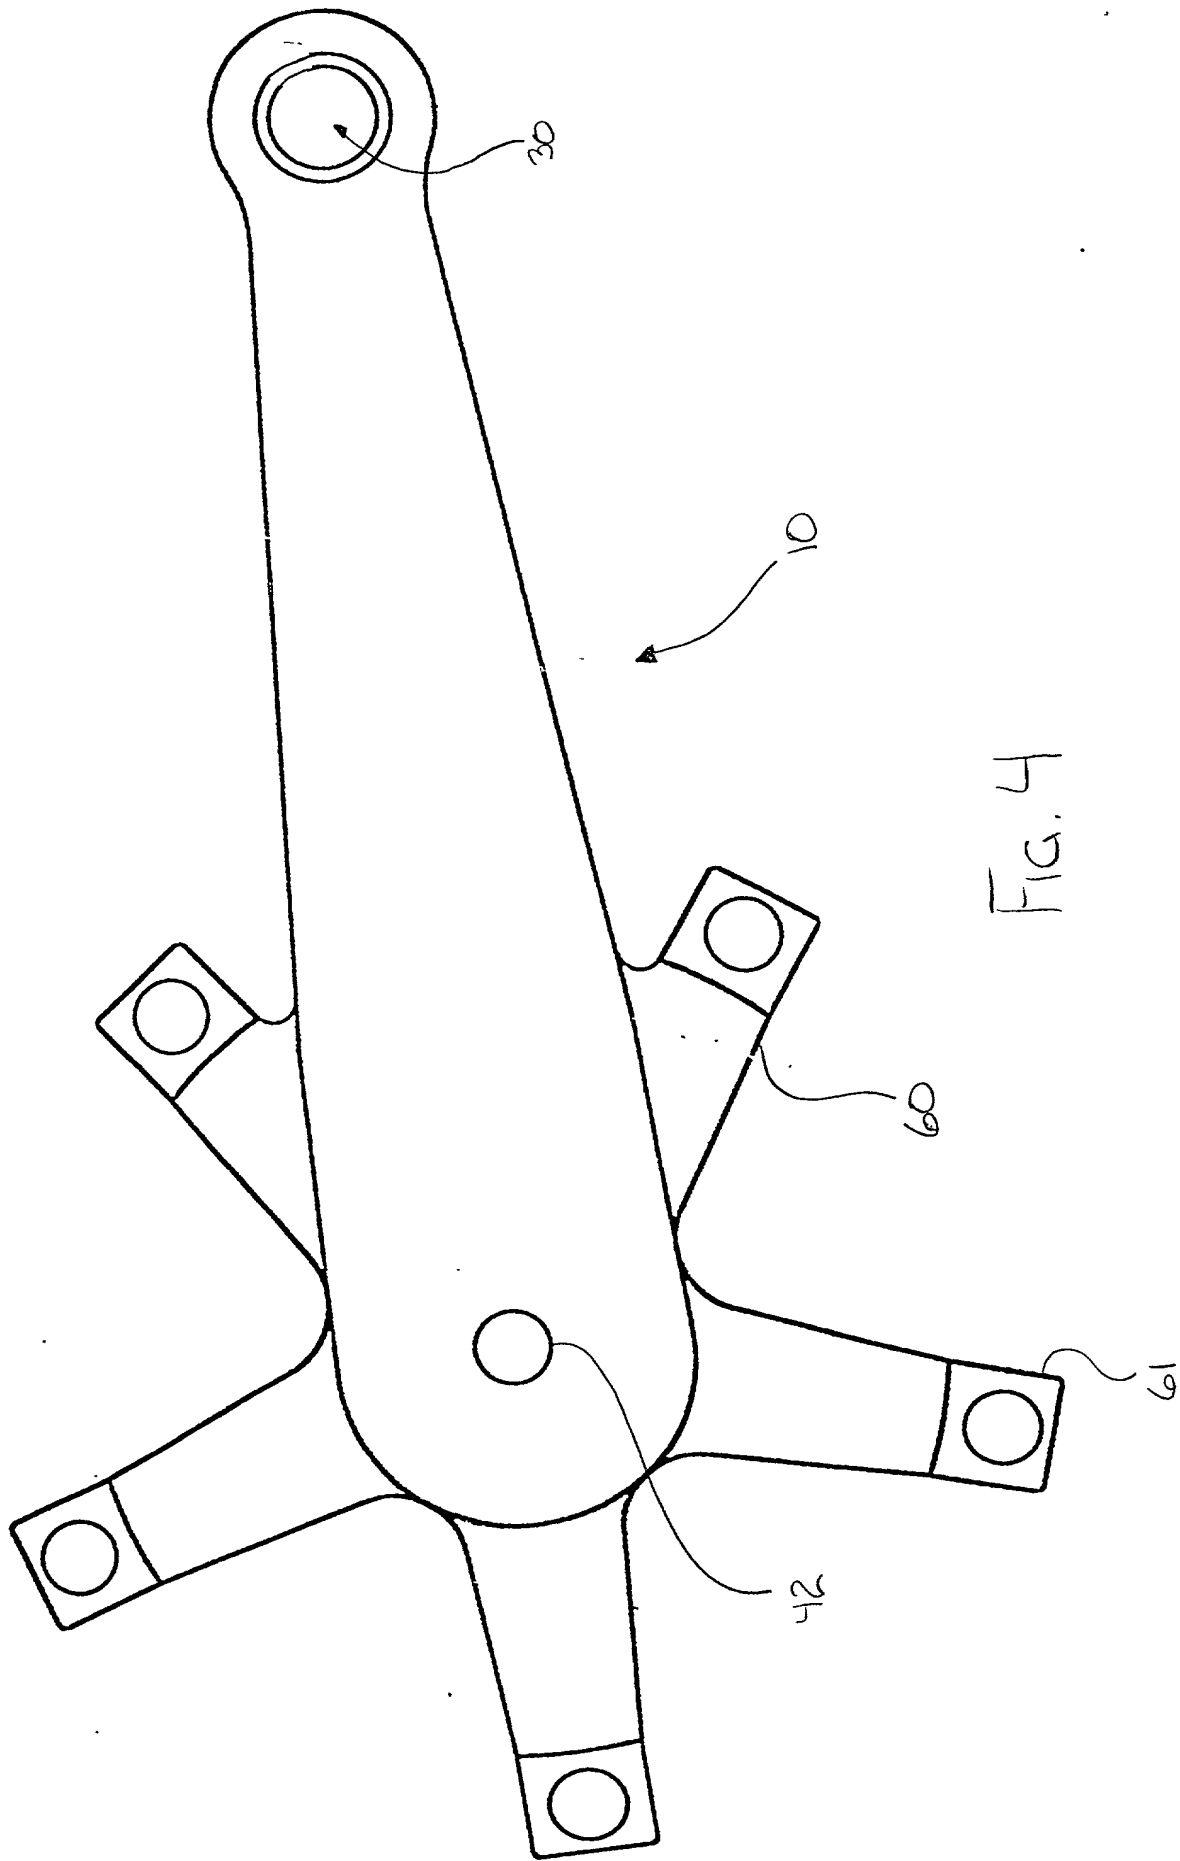


FIG. 4

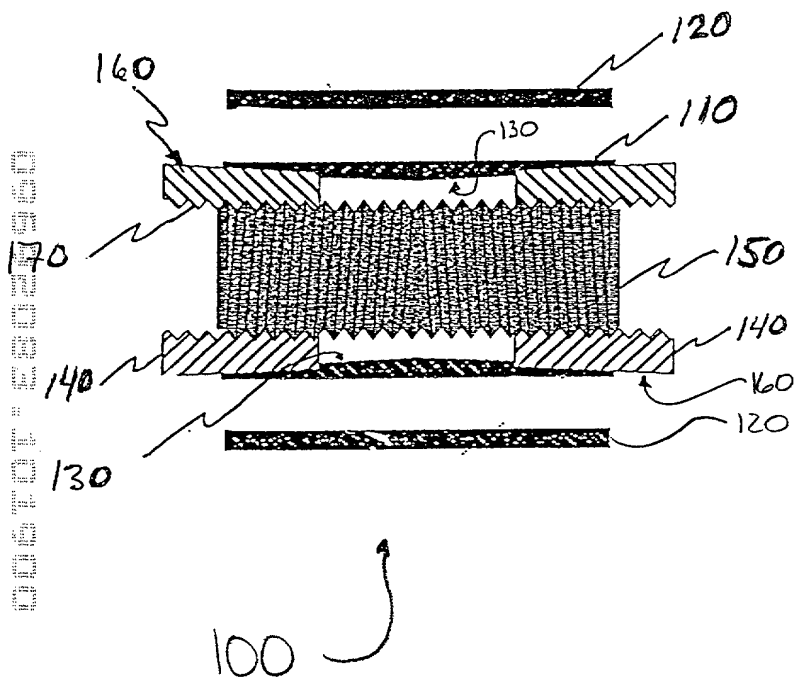


FIG. 5

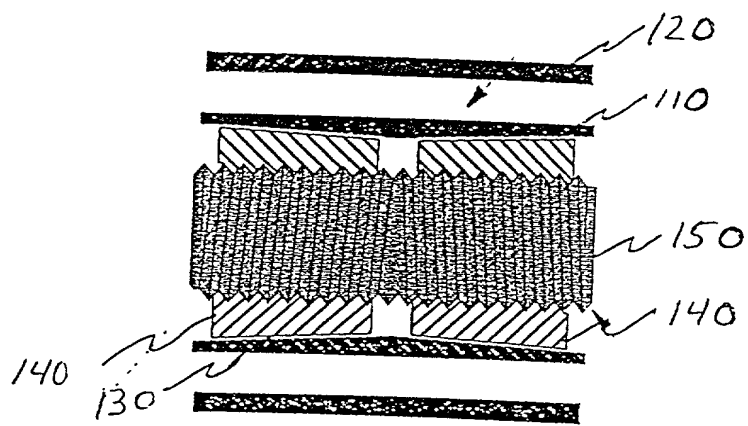


FIG. 6

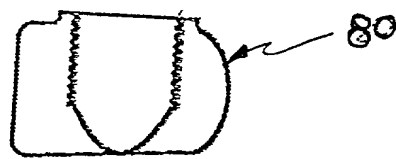


FIG. 7

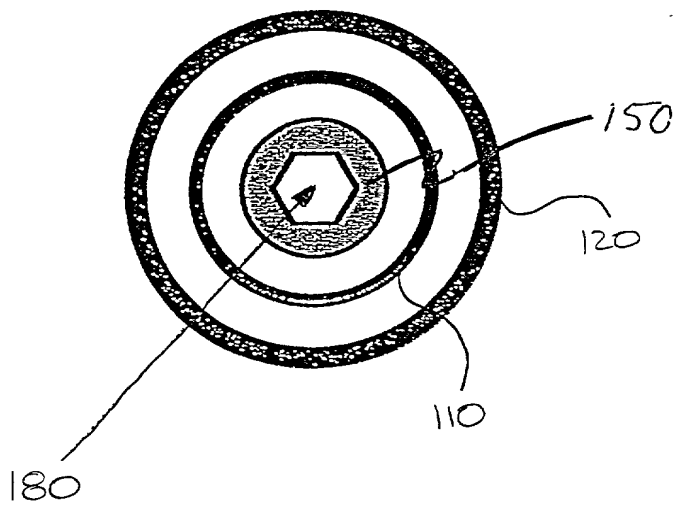


FIG. 8

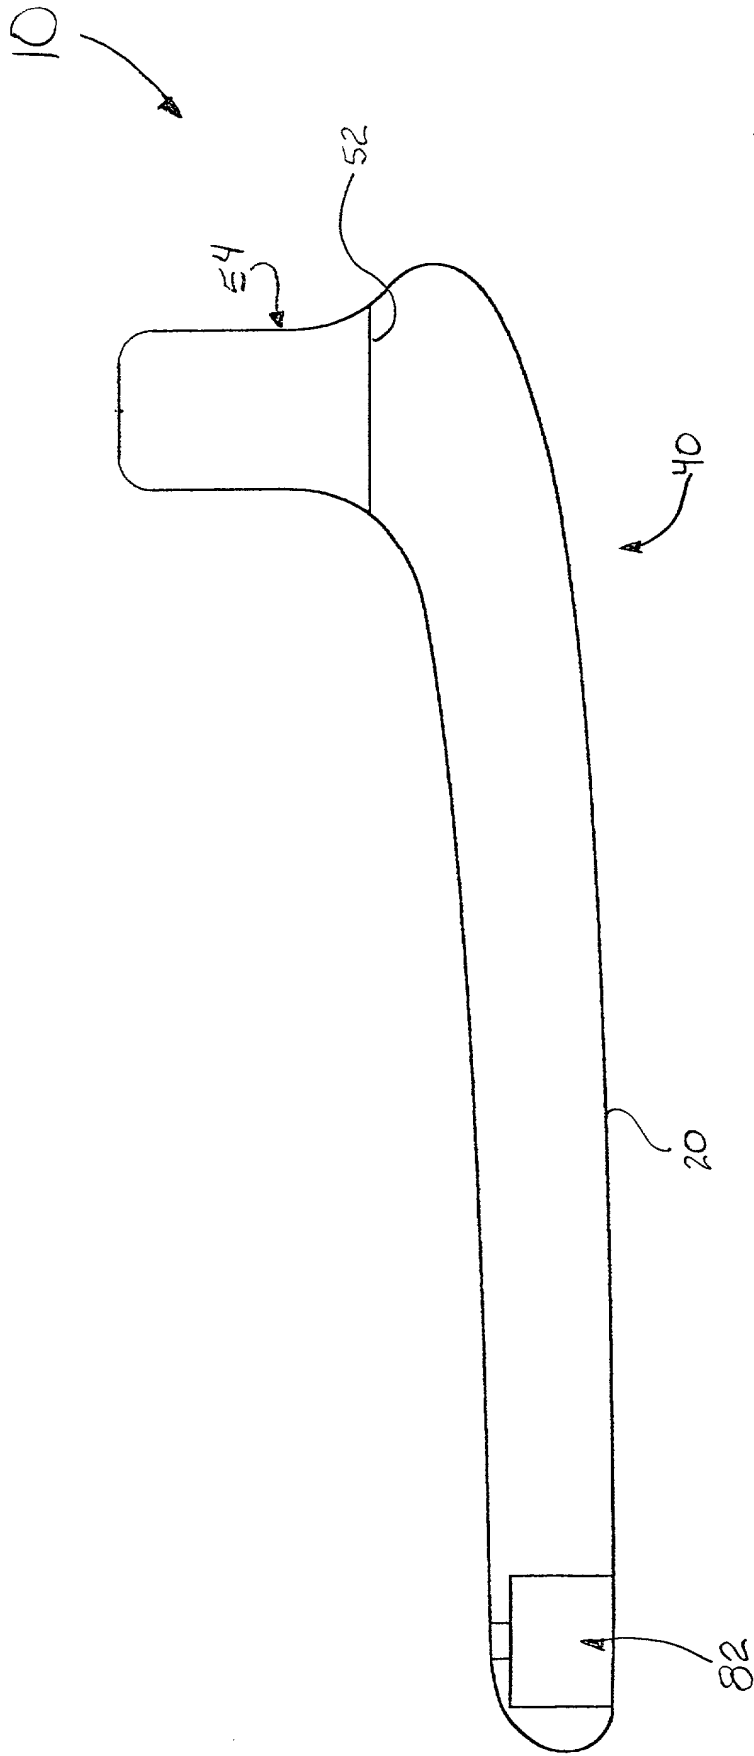


FIG. 9

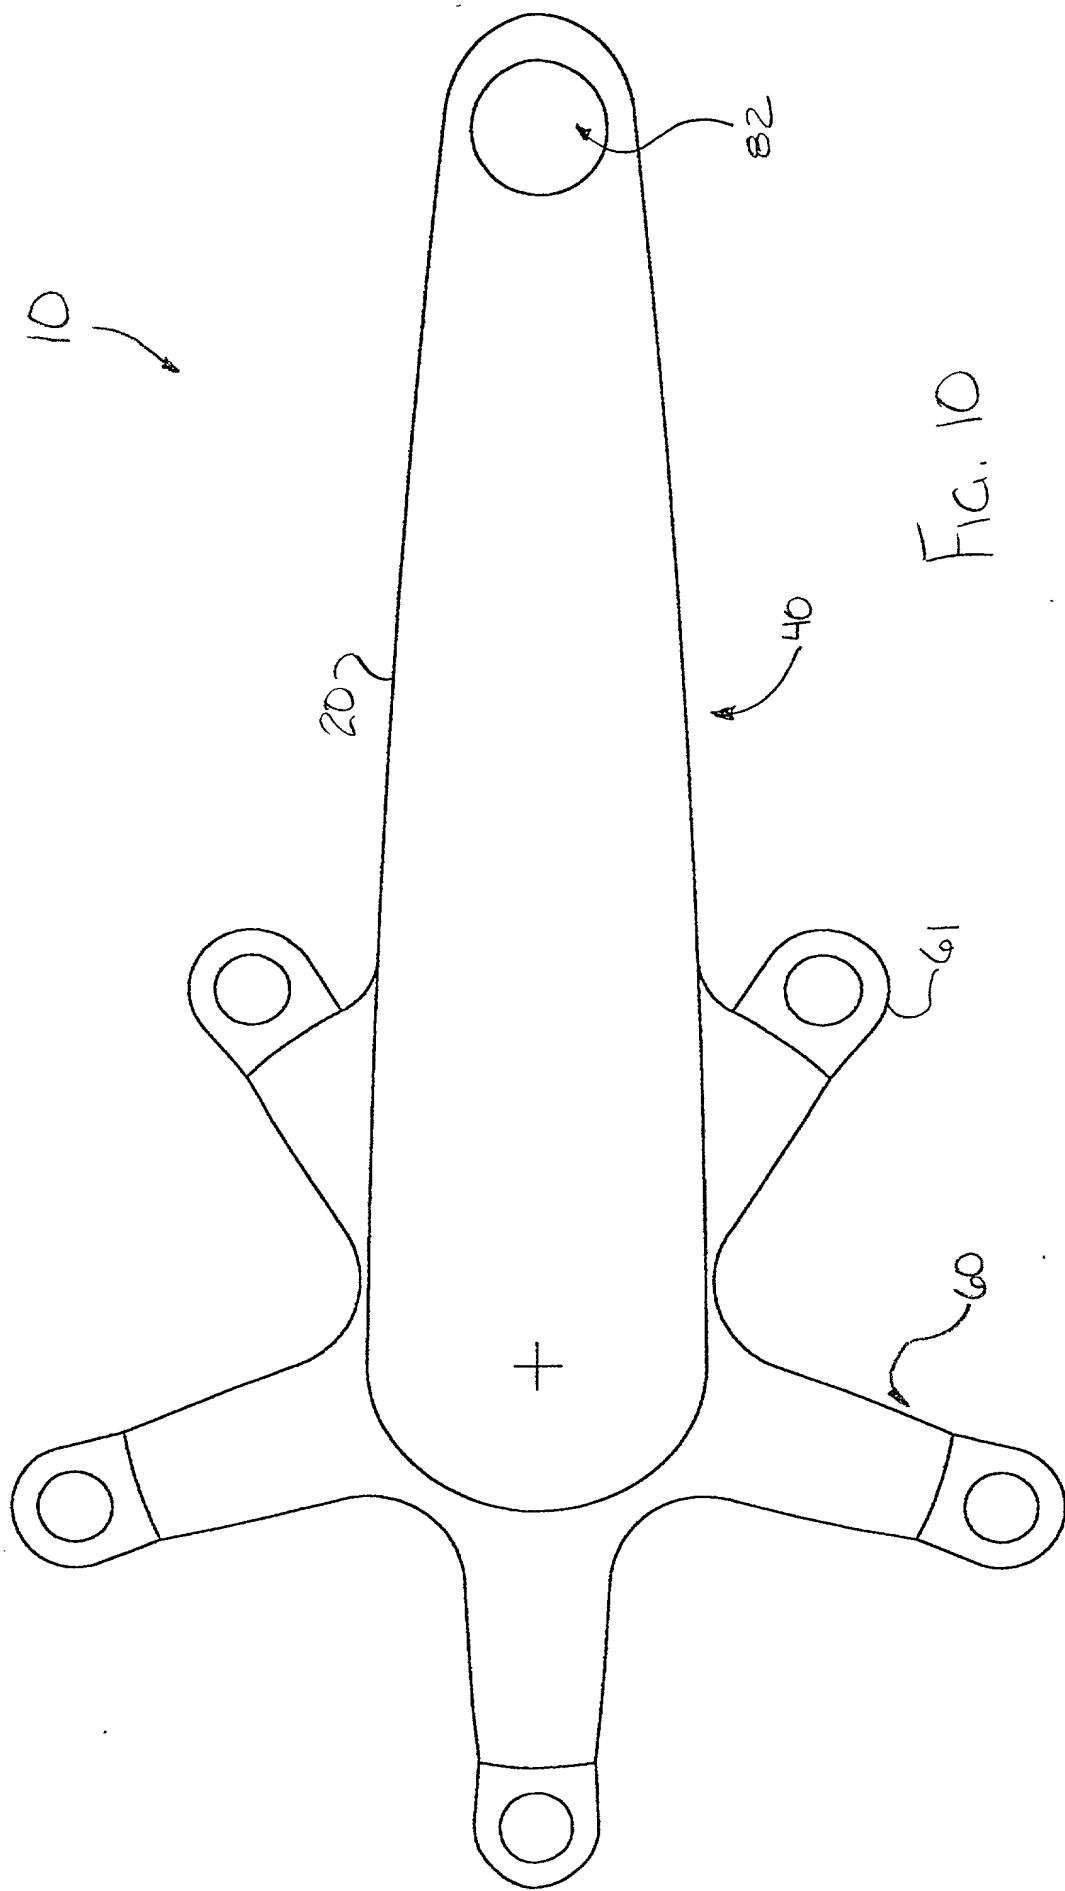


FIG. 10

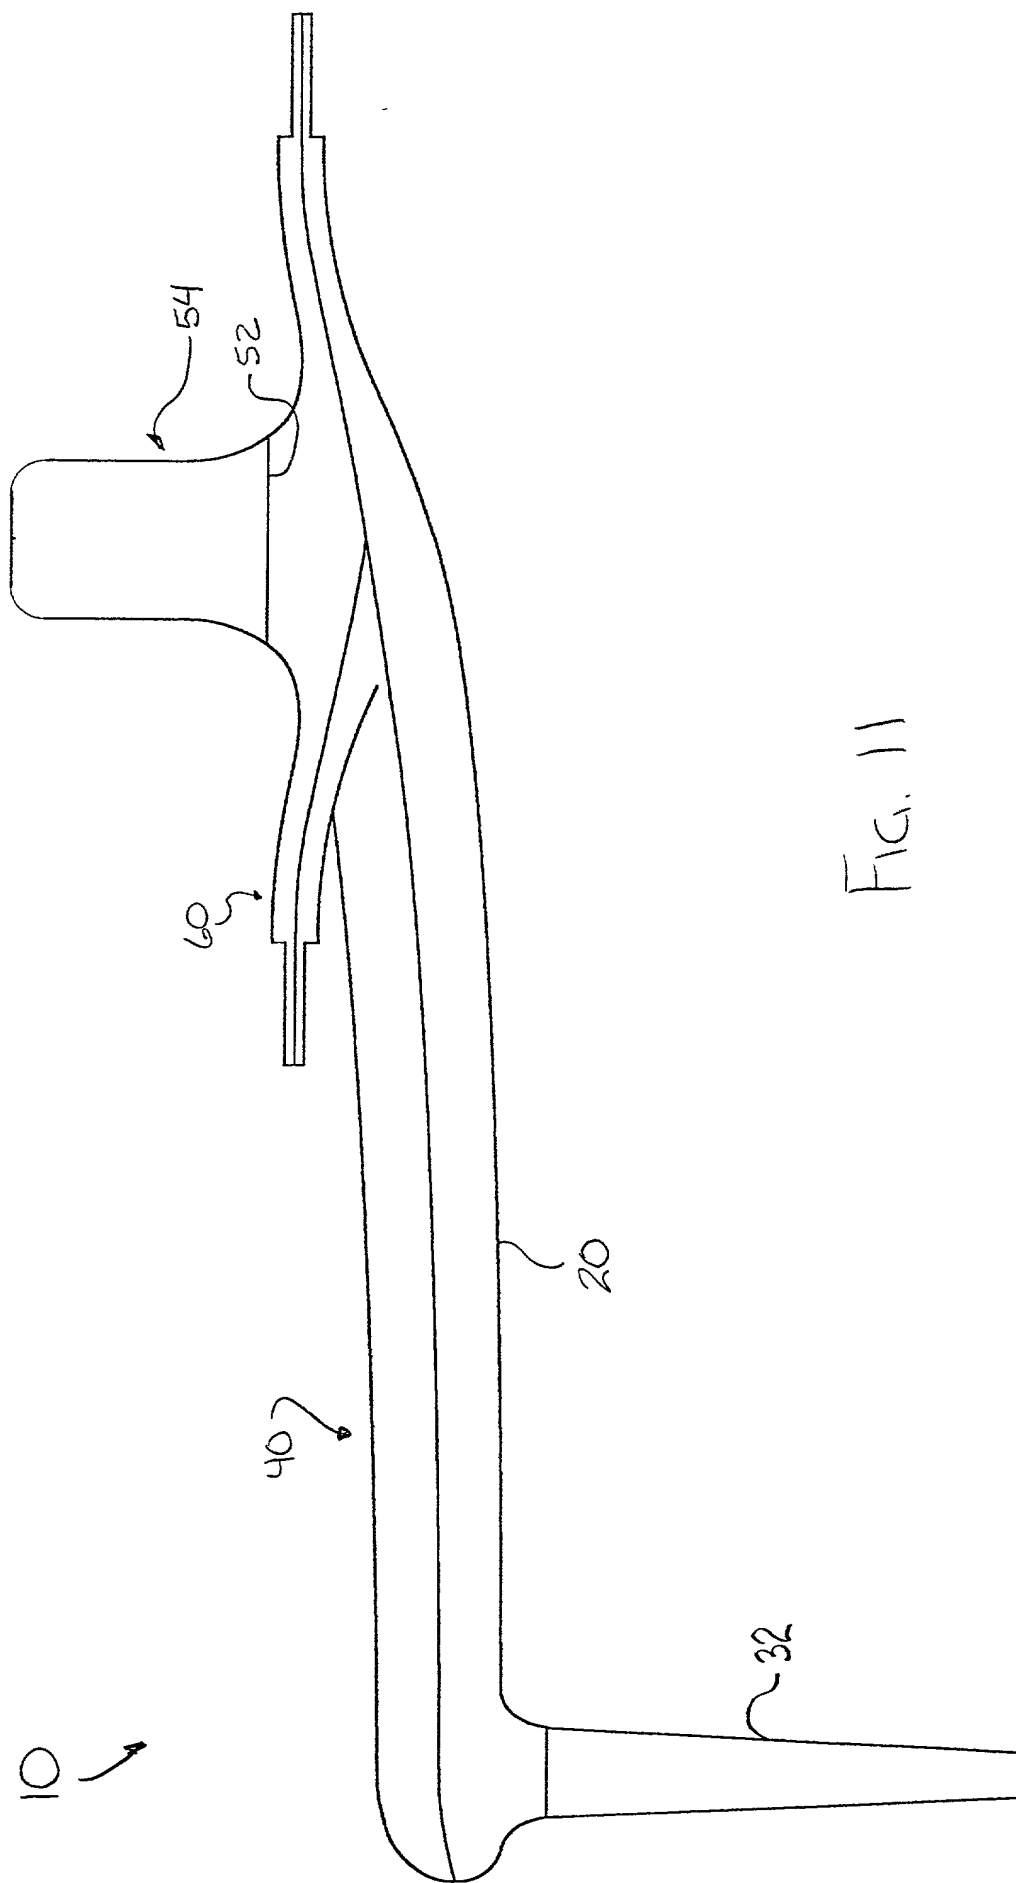


Fig. 11

200

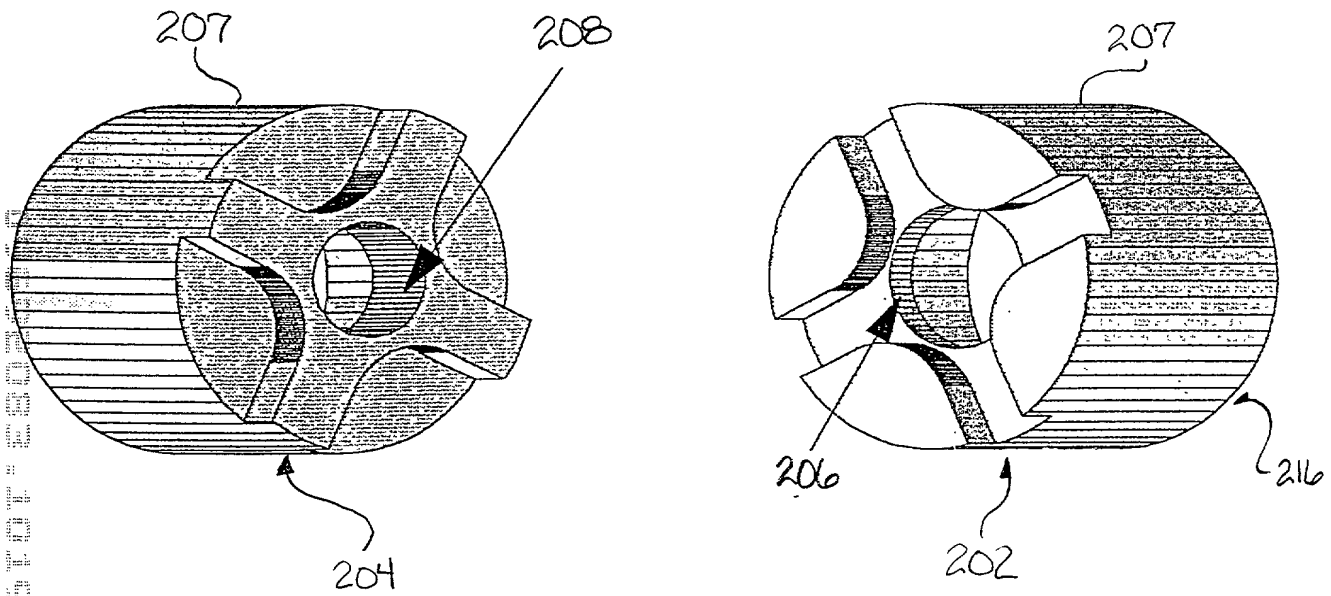


FIG. 12

FIG. 13

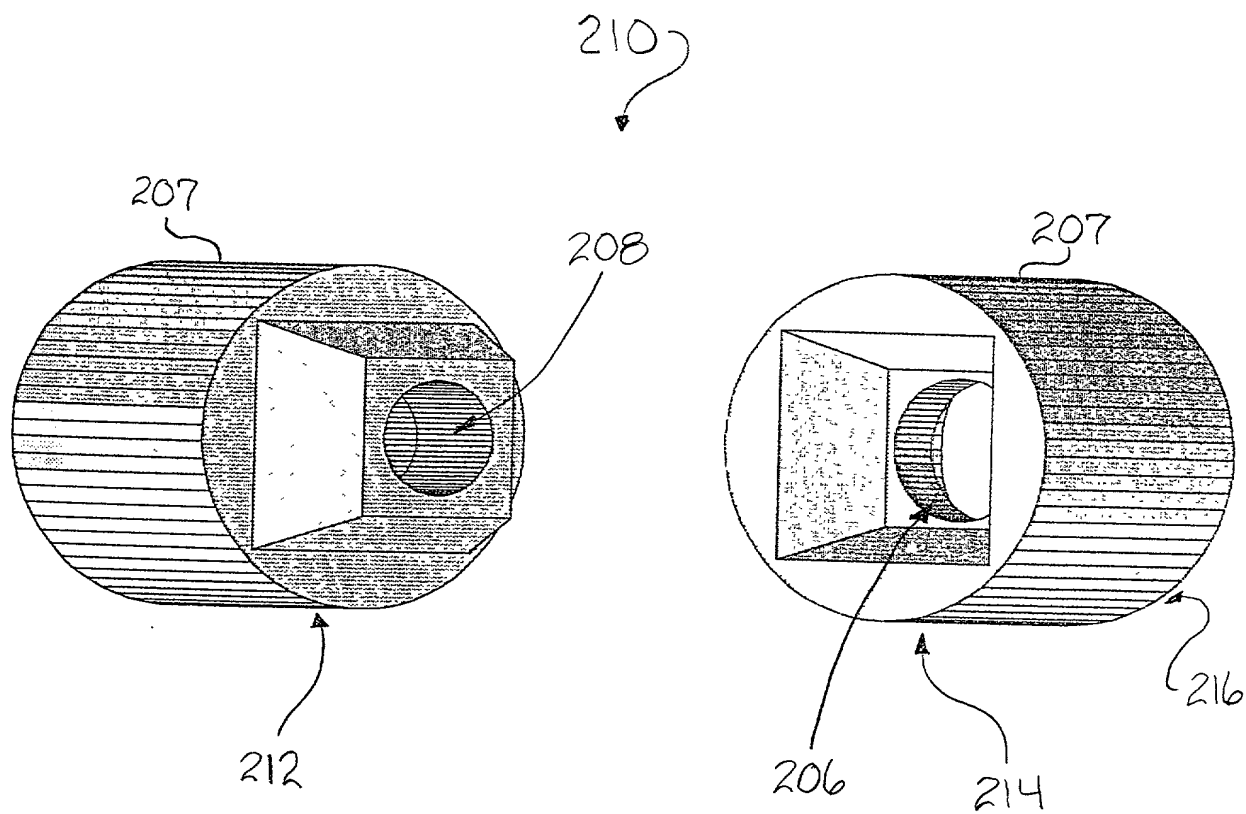


FIG. 13

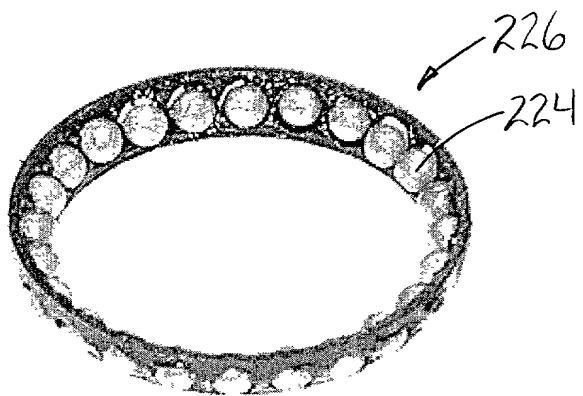


FIG. 15

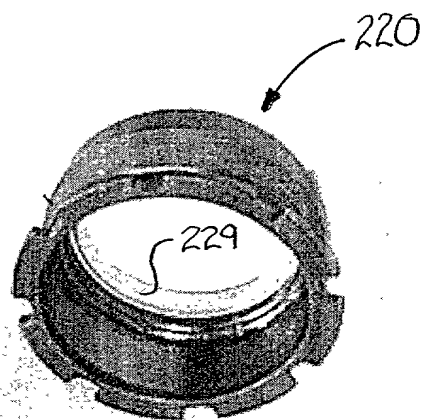


FIG. 16




FIG. 17

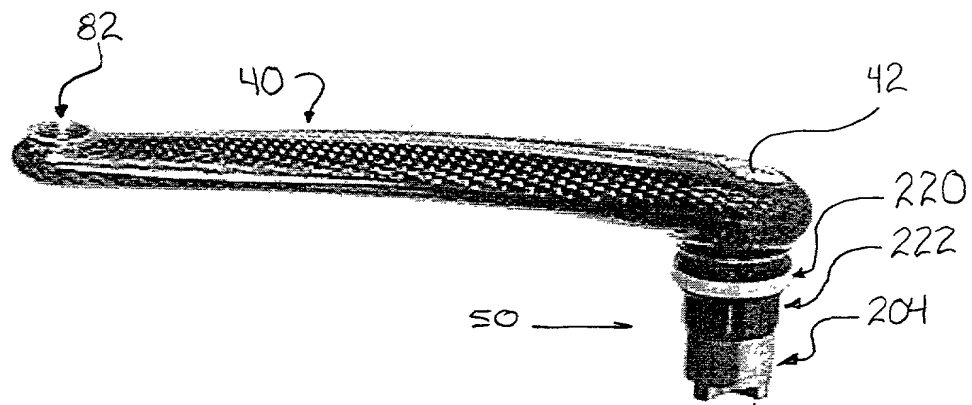


FIG. 18

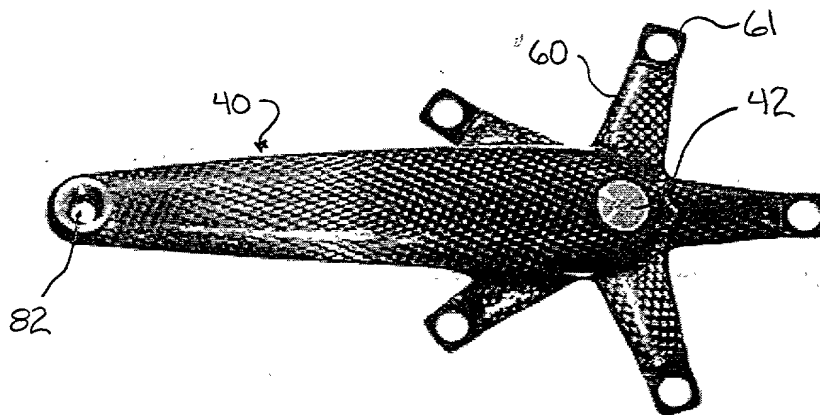


FIG. 19

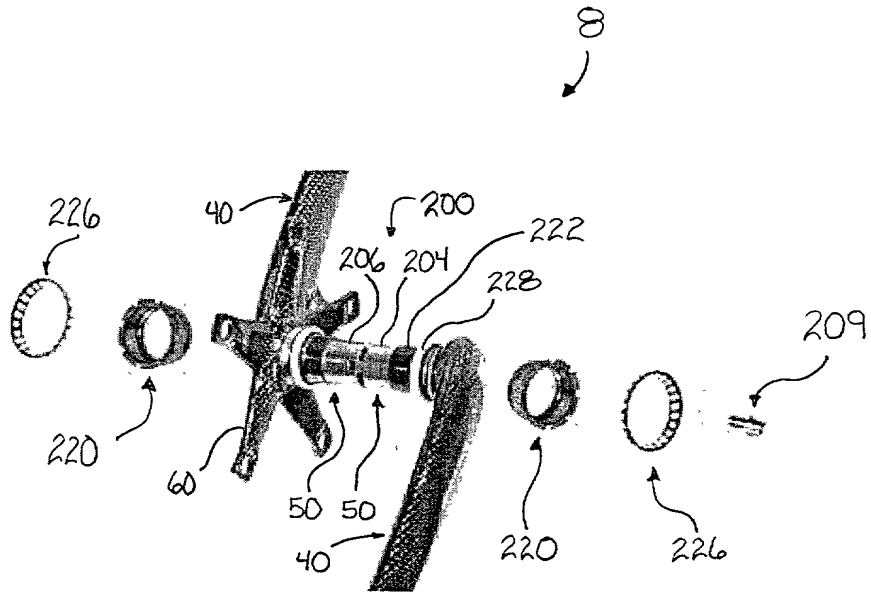


FIG. 20

FROM :

FAX NO. :

Oct. 18 2000 11:56AM P1

DECLARATION AND POWER OF ATTORNEY**13382.00005**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are stated below next to my name.

I believe I am an original inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TWO-PIECE BICYCLE CRANK SET

the specification of which (check one)

☒ is attached hereto.

☐ was filed on _____ as Application Serial No. _____ and was amended on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

PRIORITY CLAIM UNDER 35 USC § 119**PRIORITY FOREIGN APPLICATION(S) UNDER 35 USC § 119 (a)-(d)**

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

DETAILS OF FOREIGN APPLICATION FROM WHICH PRIORITY IS CLAIMED UNDER 35 USC 119 (a)-(d)			
Country	Application No.	Date of Filing (day, month, year)	Date of Issue (day, month, year)

FROM :

FAX NO. :

Oct. 18 2000 11:57AM P1

**PRIORITY U.S. PROVISIONAL APPLICATION(S)
UNDER 35 USC § 119 (e)**

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

U.S. PROVISIONAL APPLICATION NO.	FILING DATE

**PRIORITY U.S./PCT APPLICATIONS
UNDER 35 USC § 120**

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 USC § 120				
U.S. Application No.	U.S. Filing Date	Patented	Pending	Abandoned
09/580,336	May 26, 2000		x	
PCT APPLICATIONS DESIGNATING THE U.S.				
PCT Application No.	PCT FILING DATE	U.S. Application Nos. Assigned (if any)		
SEE 35 USC § 119 PRIORITY CLAIM, IF ANY, FOR ABOVE LISTED U.S./PCT APPLICATIONS				

FROM :

FAX NO. :

Oct. 18 2000 11:58AM P3

POWER OF ATTORNEY

And I hereby appoint Charles N. Quinn, Registration No. 27,223 and Bruce D. George, Registration No. 43,631 as my attorneys or agents with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Address all correspondence to Saul, Ewing LLP, Centre Square, 1500 Market Street, 38th Floor, Philadelphia, Pennsylvania 19102-2186. Address all telephone calls to Bruce D. George at (215) 972-8387; facsimile (215-972-2293).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of sole or first inventor Bruno Mombroinie

Inventor's signature 

Date 10-18-2000

Citizenship U.S.

Residence (City and State) Santa Rosa, California

Post Office-Address (Street Address) 2517 Copperfield Drive, Santa Rosa, CA 95401